



Date tehnice pentru produs: LITP0034--

Capri LED Basic 10W 1200lm 4000K simetric IP65 negru

Proiector LED



Curba distributie lumina

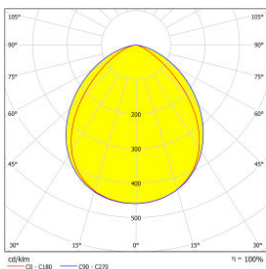

Detalii produs


The CAPRI Basic LED floodlight has a power rating of 10W (1200lm) and a color temperature of 4000K. The die-cast aluminum housing with hardened steel is rated IP65 and IK07 and offers a service life of up to 50000h. CAPRI Basic is suitable for continuous operation at 230VAC, as well as for operation lasting several hours (up to 10h) at 170-300VDC and comes with a 0.5m connection cable (H05RN-F 3x1.0 mm²) including a connector. The floodlight's beam angle is symmetrical.



Fișe tehnice

Lungime (mm)	90,00
Lățime netă (mm)	31,00
Înălțime (mm)	100,00
Masă netă (kg.)	0,37
Tip iluminare	iluminat de decor
Culoare	Negru
Sursă de lumină	LED
Putere (W)	10
Factor de putere	≥0.7
grad de protecție	IP65
Rezistență la impact	IK07
Montaj	Montaj de perete Montaj pe pardoseală Montaj încadrat în plafon
Temperatura minimă a mediului ambiant (°C)	-35
Temperatura maximă a mediului ambiant (°C)	40
Fabricant	01-Schrack-Trinity

Desen dimensional: Capri LED Basic 10W 1200lm 4000K simetric IP65 negru

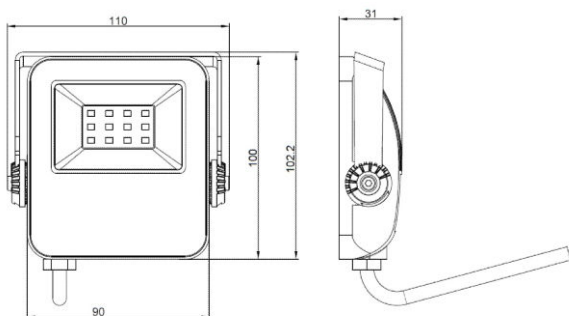

Descriere

Cod comandă

Capri LED Basic 10W 1200lm 4000K simetric IP65 negru
Proiector LED

LITP0034